

Effluent Pumps

10E SERIES (High Temperature) 1/2 HP



Applications

- Boiler blow-down sump pits, transformer vaults


Features

- 1/2 hp split-phase motor
- Designed for continuous duty
- Epoxy coated cast iron housing
- Carbon/Ni-Resist & Viton® shaft seal
- Upper and lower ball bearings
- CSA listed

Series Specifications

Capacity: 80 gpm @ 5' (302 lpm @ 1.5 m)	Impeller: Nylon
Shut Off: 24' (7.32 m)	Relay Cover: Cast iron
Liquid Temperature: 200 °F (93 °C)	Electrical: 115 V, 60 Hz
Discharge: 1-1/2" FNPT (38 mm)	Operation: Automatic or manual
	Solids Handling: 3/4" (19 mm)

Performance Curve

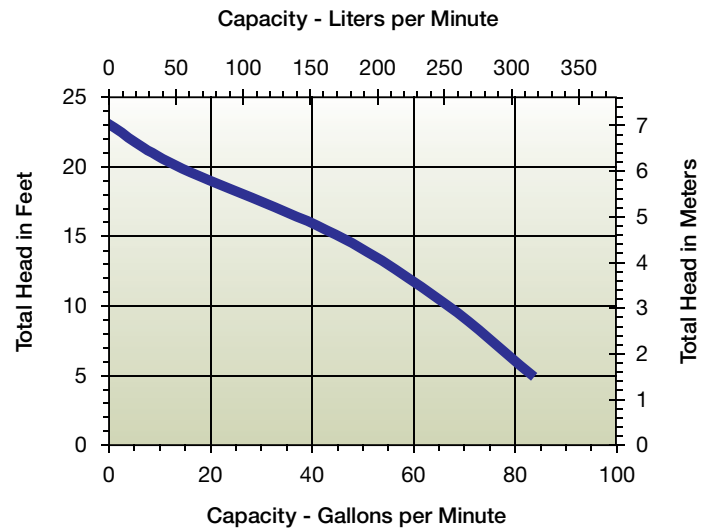

Model Characteristics

Item #	Model	Volts	Cord	Switch Type	On Level	Off Level
511700	HT-10E-CIA-FS	115	15' 4.6 m	Integral Mechanical Float	10" - 12" 25.4 cm - 30.5 cm	2" - 4" 5 cm - 10.2 cm
511600	HT-10E-CIM	115	15' 4.6 m	Manual	-	-

Features

