




# SERIES TS 840 • 100 - 800 AMP AUTOMATIC TRANSFER SWITCHES

AGRICULTURAL

**REGAL**®



## THOMSON POWER SYSTEMS TS 840 AUTOMATIC TRANSFER SWITCHES OFFER THE FOLLOWING:

### ENCLOSED CONTACT POWER SWITCHING UNITS

- Fully enclosed silver alloy contacts provide high withstand rating & 100% continuous current rating.
- 3 cycle short circuit current withstand.
- Completely isolated utility and generator side power switching units.
- Power switching units can incorporate overcurrent protection, allowing cost savings in upstream devices.
- Not damaged if manually switched while in service.

### RELIABLE MOTOR-OPERATED TRANSFER MECHANISM

- Heavy duty brushless gearmotor and operating mechanism provide mechanical interlocking and extreme long life.
- Safe manual operation permits operation under adverse conditions.

### SUPERIOR SERVICEABILITY

- All mechanical and control devices are visible and front accessible.
- All control wires and power busses are front-accessible there are no wires or connections which require removal of the transfer switch from its enclosure for servicing.

### CONTROL FEATURES

- TSC 80 microprocessor based controller
- NEMA 3R enclosure for outdoor weatherproof applications
- Isolation plug permits disconnecting control circuits from all power sources.

### QUALITY ASSURANCE

- ISO 9001 Registered

### SEISMIC CERTIFICATION

TS 840 ATS is certified for installation and operation per the following requirements:

- IBC 2006 – Section 13, Occupancy Category IV
- ASCE7-05 Region 3 (minimum SS=342%)

### SAFETY STANDARDS

- UL 1008 Automatic Transfer Switches for use in Emergency Systems
- CSA C22.2 No. 178 Automatic Transfer Switches

### WARRANTY

- 2 year limited warranty included

**Thomson Power Systems TS 840** series of Automatic Transfer Switches employ two mechanically interlocked enclosed contact power switching units and a microprocessor based controller to automatically transfer system load to a generator supply in the event of a utility supply failure. System load is automatically re-transferred back to the utility supply following restoration of the utility power source to within normal operating limits. TS 840 series automatic transfer switches provide an open transition “break-before-make” transfer system with neutral position delay to ensure adequate voltage decay to prevent out of phase transfers.

TS 840 Automatic Transfer Switches are specifically designed and certified by UL 1008 and CSA C22. No. 178 nationally recognized safety standards for use in emergency systems at 240VAC. High withstand current ratings have been achieved using 3 cycle short circuit testing in accordance with UL 1008/CSA178 standards. This allows flexible system over current coordination by utilization of non-series rated upstream protective devices. TS 840 ATS models can be utilized in light industrial, telecom and agricultural applications which legally require automatic standby power.

TS 840 series of Automatic Transfer Switches are available in 2 basic model types: Standard ATS and Service Entrance Rated (SE). Service Entrance Rated Automatic Transfer Switches incorporate an isolating mechanism and over current protection on the utility supply thereby removing the need to have a separate, upstream circuit breaker/disconnect switch from the transfer switch. This unique Service Entrance Rated ATS design is incorporated into a standard sized automatic transfer switch enclosure providing a space-saving, cost effective solution for most applications. TS 840 SE Service disconnect operation is very simple and ensures a high level of safety for system maintenance personnel when performed. Normal operation and performance of the automatic transfer switch is unaffected by the Service Entrance feature.

TS 840 series automatic transfer switches use a type TSC 80 microprocessor based controller which provides all necessary control functions for fully automatic operation.







## WITHSTAND CURRENT RATINGS (ALL MODELS)

| MODEL          | RATED CURRENT (AMPS) | MAXIMUM VOLTAGE | WITHSTAND CURRENT RATING AMPS (RMS) <sup>1</sup>  |                               |                 |
|----------------|----------------------|-----------------|---|-------------------------------|-----------------|
|                |                      |                 | With Upstream Circuit Breaker Protection<br>@240V | With Upstream Fuse Protection |                 |
|                |                      |                 |   | @240V                         | FUSE TYPE       |
| TS 84xA - 0100 | 100A                 | 240             | 65,000  | 100,000                       | T,J             |
| TS 84xA - 0150 | 150A                 | 240             | 65,000  | 100,000                       | T,J             |
| TS 84xA - 0200 | 200A                 | 240             | 65,000  | 100,000                       | T,J             |
| TS 84xA - 0250 | 250A                 | 240             | 65,000  | 100,000                       | T,J             |
| TS 84xA - 0400 | 400A                 | 240             | 65,000  | 100,000                       | T,J             |
| TS 84xA - 0600 | 600A                 | 240             | 65,000  | 100,000                       | T,J             |
| TS 84xA - 0800 | 800A                 | 240             | 65,000  | 100,000                       | Consult Factory |

## ENCLOSURE DIMENSIONS/CABLE TERMINALS (NEMA 3R, ASA #61 GRAY)

| AMPERAGE                 | NUMBER OF POLES | DIMENSIONS INCHES (mm) <sup>1</sup> |              |             | SHIPPING WEIGHT lbs (kg) | TERMINAL RATING <sup>3</sup> |                    |
|--------------------------|-----------------|-------------------------------------|--------------|-------------|--------------------------|------------------------------|--------------------|
|                          |                 | HEIGHT                              | WIDTH        | DEPTH       |                          | QTY (PER PHASE)              | RANGE <sup>4</sup> |
| 100A                     | 2,3             | 31.1" (790)                         | 22.3" (566)  | 14.0" (356) | 143 lbs (65)             | 1                            | #14 - 1/0          |
| 100A w/Dist <sup>2</sup> | 2,3             | 43.1" (1095)                        | 34.3" (871)  | 13.0" (330) | 233 lbs (106)            | 1                            | #14 - 1/0          |
| 150A                     | 2,3             | 31.1" (790)                         | 22.3" (566)  | 14.0" (356) | 143 lbs (65)             | 1                            | #2 - 4/0           |
| 150A w/Dist <sup>2</sup> | 2,3             | 43.1" (1095)                        | 34.3" (871)  | 13.0" (330) | 233 lbs (106)            | 1                            | #2 - 4/0           |
| 200A                     | 2,3             | 31.1" (790)                         | 22.3" (566)  | 14.0" (356) | 143 lbs (65)             | 1                            | #6 - 350 mcm       |
| 200A w/Dist <sup>2</sup> | 2,3             | 43.1" (1095)                        | 34.3" (871)  | 13.0" (330) | 237 lbs (108)            | 1                            | #6 - 350 mcm       |
| 250A                     | 2,3             | 35.1" (892)                         | 27.3" (693)  | 14.0" (356) | 172 lbs (78)             | 1                            | #6 - 350 mcm       |
| 250A w/Dist <sup>2</sup> | 2,3             | 43.1" (1095)                        | 34.3" (871)  | 13.0" (330) | 251 lbs (114)            | 1                            | #6 - 350 mcm       |
| 400A                     | 2,3             | 43.1" (1095)                        | 34.3" (871)  | 13.0" (330) | 227 lbs (103)            | 2                            | 2/0 - 500 mcm      |
| 400A w/Dist <sup>2</sup> | 2,3             | 63.1" (1603)                        | 40.8" (1036) | 14.5" (368) | 354 lbs (161)            | 2                            | 2/0 - 500 mcm      |
| 600A                     | 2,3             | 46.1" (1171)                        | 36.3" (922)  | 14.5" (368) | 248 lbs (113)            | 2                            | 2/0 - 500 mcm      |
| 600A w/Dist <sup>2</sup> | 2,3             | 63.1" (1603)                        | 40.8" (1036) | 14.5" (368) | 358 lbs (163)            | 2                            | 2/0 - 500 mcm      |
| 800A                     | 2,3             | 48.1" (1222)                        | 37.8" (960)  | 18.0" (457) | 309 lbs (140.4)          | 3                            | 2/0 - 500 mcm      |
| 800A w/Dist <sup>2</sup> | 2,3             | 63.1" (1603)                        | 40.8" (1036) | 18.0" (457) | 422 lbs (192)            | 3                            | 2/0 - 500 mcm      |

<sup>1</sup> Enclosure dimensions are for reference.(DO NOT USE FOR CONSTRUCTION)


<sup>2</sup> Enclosures for models with Distribution Breaker Options (Dist 2 or Dist 4)

<sup>3</sup> All cable connections suitable for copper or aluminum

<sup>4</sup> Optional terminal ratings are available in some models – Consult Thomson Power Systems

## STANDARD FEATURES (With TSC 80 Controller)

- Load on Utility & Load on Generator Lights
- Utility & Generator Source Available Lights
- Three Phase Voltage Sensing on Utility & Generator Sources
- Under Frequency Sensor on Generator Source
- Engine Start Delay Timer 0-60 sec.
- Engine Cooldown Delay Timer 0-30 min.
- Engine Warm-up Timer 0-60 sec.
- Neutral Position Delay 0-60 sec.
- Utility Return Timer 0-30 min.
- Engine Start Contact (10A, 120/240 VAC res. Form B)
- Exercise Timer (On or Off Load, Fixed 30 min.)
- Auxiliary Contact - Utility side (10A, 120/240 VAC res. Qty 1, Form C)
- Auxiliary Contact - Generator side (10A, 120/240 VAC res. Qty 1, Form C)
- Local Utility Power Fail Simulation Test Pushbutton
- Provision for Remote Load Test/Peak Shave Switch Input
- NEMA 3R Enclosure
- Solid Neutral
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Temperature: -40°C to 50°C (-40°F to 122°F)
- Humidity: 95% non-condensing, maximum

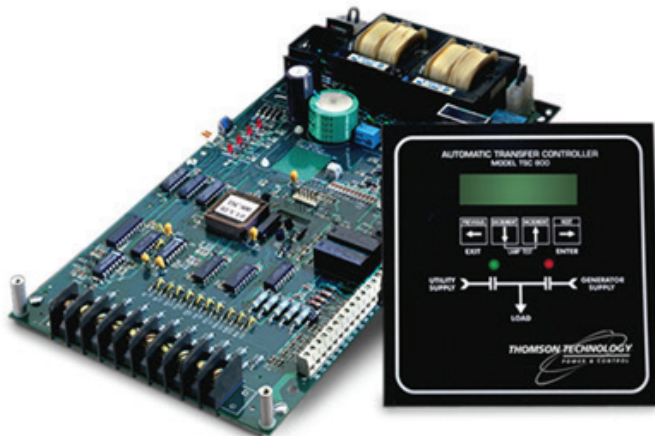

## ORDERING INFORMATION

When placing an order, specify the following 21 digit ATS MODEL CODE as per the features and applications described below.

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 |
| T | S |   | 8 | 4 |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |

### 1-3. SERIES

TS - TRANSFER SWITCH

### 4 & 5. MODEL

84 - 840 SWITCH

### 6. POLES

2 - 2 POLE

3 - 3 POLE

### 7. CONFIGURATION TYPE

A - ATS

### 8 - 11. AMPERAGE

0100

0150

0200

0250

0400

0600

0800

### 12. APPLICATION

A - STANDARD

B - SERVICE ENTRANCE

### 13. OPERATION TYPE

1 - OPEN TRANSITION

### 14. SAFETY STANDARDS

A - UL 1008 (Service Entrance)

B - CSA C22.2 NO 178

C - UL 1008 / CSA 178

### 15. VOLTAGE

#### 1Ø 3 WIRE

D - 120/240

#### 3Ø 4 WIRE (GROUNDED NEUTRAL)

E - 120/208

G - 120/240 (DELTA)

### 16. CONTROLLER

1 - TSC80

### 17. ENCLOSURE TYPE

D - NEMA3RSD, ASA #61 GRAY

E - NEMA3RDD, ASA #61 GRAY  
(800A Only)

### 18. UTILITY SWITCHING DEVICE

K - MOLDED CASE SWITCH (100 - 800A)

M - MOLDED CASE SWITCH C/W THER-MAG  
TRIP (100-200A)

N - MOLDED CASE SWITCH C/W ELECTRONIC  
TRIP (250-800A)

### 19. GENERATOR SWITCHING DEVICE

K - MOLDED CASE SWITCH (100 - 800A)

M - MOLDED CASE SWITCH C/W THER-MAG  
TRIP (100-200A)

N - MOLDED CASE SWITCH C/W ELECTRONIC  
TRIP (250-800A)

### 20. POWER CONNECTIONS

A - STANDARD

### 21. ATS CONNECTION CONFIGURATION

A - STANDARD



## AVAILABLE IN STOCK

The following standard Automatic Transfer Switch models are available from stock:

| MODEL                | AMPERAGE | 2 POLE<br>(SINGLE<br>PHASE, 3<br>WIRE WITH<br>NEUTRAL) | STANDARD<br>ATS                     | S E R V I C E<br>E N T R A N C E<br>R A T E D A T S | VOLTAGE  | TSC 80<br>CONTROLLER                | NEMA 3R<br>ENCLOSURE                |
|----------------------|----------|--|-------------------------------------|---|----------|-------------------------------------|-------------------------------------|
| TS842A0200A1AD1DKKAA | 200A     | <input checked="" type="checkbox"/>                    | <input checked="" type="checkbox"/> |   | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0200B1AD1DNKAA | 200A     | <input checked="" type="checkbox"/>                    |                                     | <input checked="" type="checkbox"/>                 | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0250A1AD1DKKAA | 250A     | <input checked="" type="checkbox"/>                    | <input checked="" type="checkbox"/> |   | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0250B1AD1DNKAA | 250A     | <input checked="" type="checkbox"/>                    |                                     | <input checked="" type="checkbox"/>                 | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0400A1AD1DKKAA | 400A     | <input checked="" type="checkbox"/>                    | <input checked="" type="checkbox"/> |   | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0400B1AD1DNKAA | 400A     | <input checked="" type="checkbox"/>                    |                                     | <input checked="" type="checkbox"/>                 | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0600A1AD1DKKAA | 600A     | <input checked="" type="checkbox"/>                    | <input checked="" type="checkbox"/> |   | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TS842A0600B1AD1DNKAA | 600A     | <input checked="" type="checkbox"/>                    |                                     | <input checked="" type="checkbox"/>                 | 120/240V | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

## OPTIONAL FEATURES (Specify separately from ATS MODEL CODE when ordering)

| CODE   | DESCRIPTION  |
|--------|--|
| Dist 2 | Load Distribution Breakers (Qty 2, 200A, 2 Pole Only)  |
| Dist 4 | Load Distribution Breakers (Qty 4, 200A, 2 Pole Only)  |
| Dist 6 | Load Distribution Breakers (Qty 6, 200A, 2 Pole Only)  |
| SDM    | LCD Service Display Module <ul style="list-style-type: none"><li>- Displays TSC 80 Controller Settings and Timer Adjustments</li><li>- Plug in Connector and Cable</li></ul> |
| TS-H1  | Enclosure Strip Heater c/w Thermostat (120VAC External Power Source Required)  |
| TS-H2  | Enclosure Strip Heater c/w Thermostat (Internally Powered from ATS Load)   |



**Thomson Power Systems**

9087A - 198th Street  
Langley, BC, Canada V1M 3B1  
Customer Service: 604-888-0110  
info@thomsonps.com  
www.thomsonps.com



NOTE: Specifications subject to change without notice.

**APPLICATION CONSIDERATIONS**

The proper selection and application of power generation products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and its affiliates with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, Disclaimers of Warranty, Limitation of Liability and Remedy, please contact Customer Service at 1-888-888-0110. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal Beloit America Inc. product referred to herein, including any person who buys from a licensed distributor of these branded products.

Thomson Power Systems and Regal are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2016, 2017 Regal Beloit Corporation, All Rights Reserved. CL056r11 17/04/24

