

Sump Pumps

6E SERIES (High Temperature) 1/3 HP

Sump/Effluent



Applications

- Boiler blow-down sump pits, transformer vaults

Features

- 1/3 hp shaded pole motor with overload protection
- Designed for continuous duty
- Epoxy coated cast iron housing
- Carbon/Ni-Resist & Viton® shaft seal
- Upper and lower sintered sleeve bearings
- CSA listed

Series Specifications

Capacity: 50 gpm @ 5' (189 lpm @ 1.5 m)

Shut Off: 20' (6 m)

Liquid Temperature: 200 °F (93 °C)

Discharge: 1-1/2" FNPT (38 mm)


Impeller: Vortex nylon

Electrical: 115 V, 60 Hz

Operation: Automatic

Solids Handling: 1/2" (12.7 mm)

Performance Curve

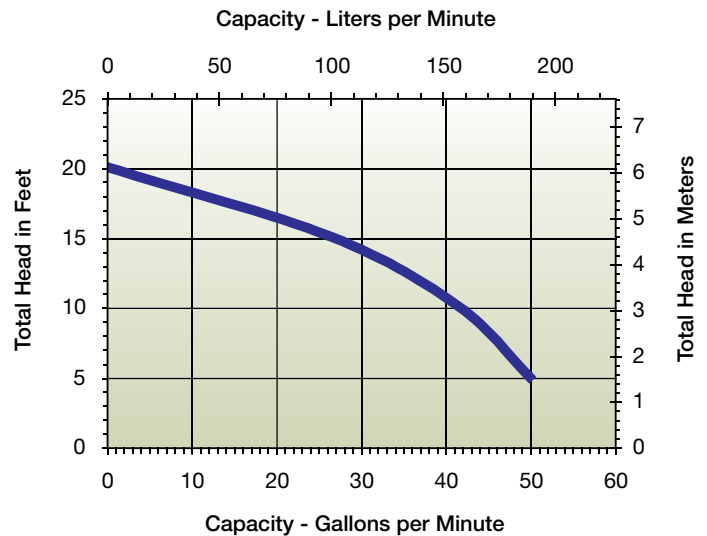

Model Characteristics

Item #	Model	Volts	Cord	Switch Type	On Level	Off Level
506600	HT-6E-CIA-FS	115	15' 4.6 m	Integral Mechanical Float	11" - 14" 27.9 cm - 35.5 cm	2" - 4" 5 cm - 10.2 cm

Features

