


- Bronze Construction
- Buna-N Mechanical Seal and O-Ring
- Maximum Working Pressure
 50 PSI
- Maximum Temperature 180° F
- Maximum Flow 17 GPM
- Maximum Head 12 Ft.
- Self-Cleaning, Semi-Open Impeller
- 12 Volt DC or 115 VAC Motor, Depending on Model



The AMT Model 3670-97 Naval Bronze Straight Centrifugal pump is designed for low pressure salt water wash down and recirculating applications. The pump has been sized for salt water (1.03 specific gravity) and feature provisions for the installation of a seal wash, front drain plug and pull-from-rear design. The pump is powered by a 1725 PM, 115 VAC, 1/4 HP motor.


The AMT Model 4861-97 Bronze Centrifugal pump is compact and designed for use in general dewatering, salt water applications in live well tanks, circulation and chemical transfer. This pump is fitted with a 1/8 HP, 12 Volt DC, 3700 RPM motor. **Pumps are not self-priming and require flooded suction.**

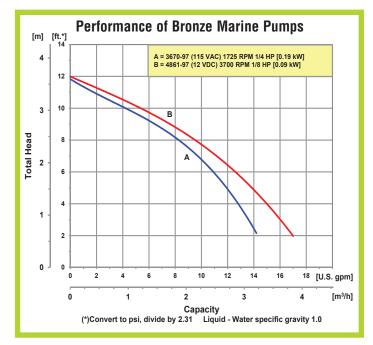




3/4" x 3/4"

Pump Dimensional & Specification Data

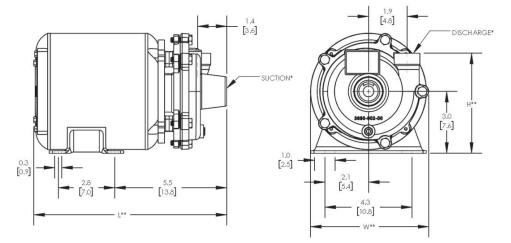

Model 3670-97



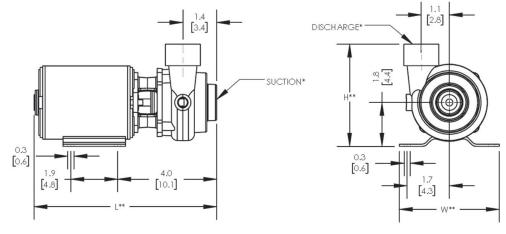

Model	Curve	НР	PH	RPM	ENC	Voltage @ 60 Hz	Full Load Amps	SUC*	DIS*	L**	W**	H**	Ship Wt. (Lbs.)
4861-97	В	1/8	-	3700	TENV	12.8V DC	9	3/4	3/4	7.3 [18.6]	4.0 [12.2]	4.1 [10.4]	7
3670-97	Α	1/4	1	1750	ODP	115	6	3/4	1/2	9.4 [23.9]	5.8 [14.6]	4.9 [12.3]	17

^(*) Standard NPT (Female) pipe thread.

NOTE: Dimensions are in inches [centimeters] and have a tolerance of $\pm 1/4$ ".

NOTE: Electric supply for ALL motors must be within $\pm 10\%$ of nameplate voltage rating (e.g. $230V \pm 10\% = 207$ to 253).

Maximum Solids Handling Capacity: 3670-97 - 1/8" Diameter 4861-97 - 3/16" Diameter

Standard Features

- Bronze Construction
- · Buna-N Mechanical Seal and O-ring
- Maximum Working Pressure 50 PSI
- Maximum Temperature 180° F
- Maximum Flow 17 GPM

- Maximum Head 12 Ft.
- · Self-cleaning, Semi-open Impeller
- 12 Volt DC or 115 VAC Motors
- QSP Quick Ship Pumps



Manufacturer of AMT & IPT Pumps

400 Spring Street • Royersford, PA 19468 USA

www.amtpump.com • 888-amt-pump (268-7867) The Gorman-Rupp Company reserves the right to discontinue any model or change specifications at any time without incurring any obligation ©2012 American Machine and Tool Company. All rights reserved



^(**) This dimension may vary due to motor manufacturer's specifications.