

Sump & Utility Pumps

MAX LIQUID TEMPERATURE ...150°F
SHAFTStainless Steel
CHECK VALVERemoveable
DISCHARGE CONNECTIONBarbed and threaded
OPERATIONFully automatic
CORD6 ft. power cord with ground
OUTLET3/8" O.D. outlet

FEATURES:

High Impact ABS Tank
 Wall mounts
 Three 1-1/8" Dia. intake holes
 Quiet operation
 Built-in safety switch (BC-20S only)

* High water alarm switch internal. BC-20S leads should be connected to a class 2 voltage circuit (not to exceed 30 volts).




Series: BC-15, BC-20S
BC-15: 1/50 hp, 60Hz.
BC-20S: 1/30 hp, 60Hz.




220312

DESCRIPTION:

GENERAL PURPOSE RESIDENTIAL AND COMMERCIAL PUMP USED FOR CONDENSATE REMOVAL FROM HIGH EFFICIENCY FURNACES, A/C EQUIPMENT, DEHUMIDIFIERS, ICE MACHINES AND OTHER CONDENSATE PRODUCING APPLICATIONS.

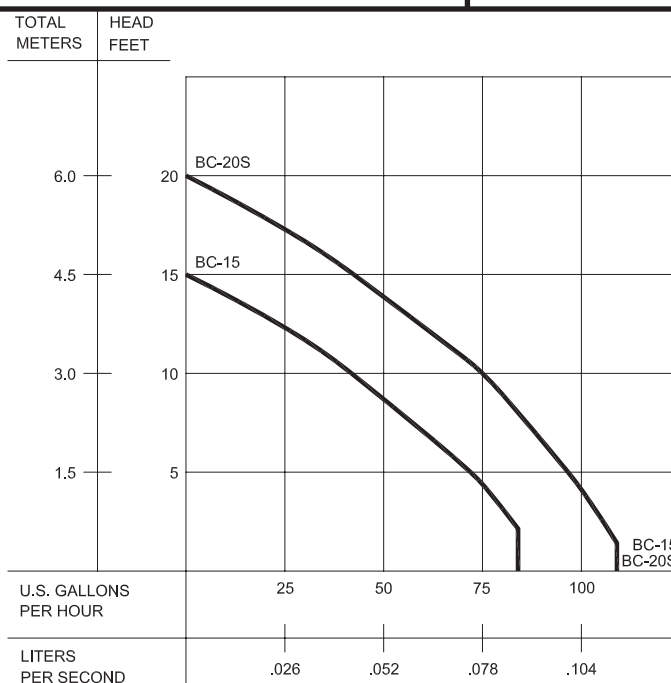

Sump & Utility Pumps

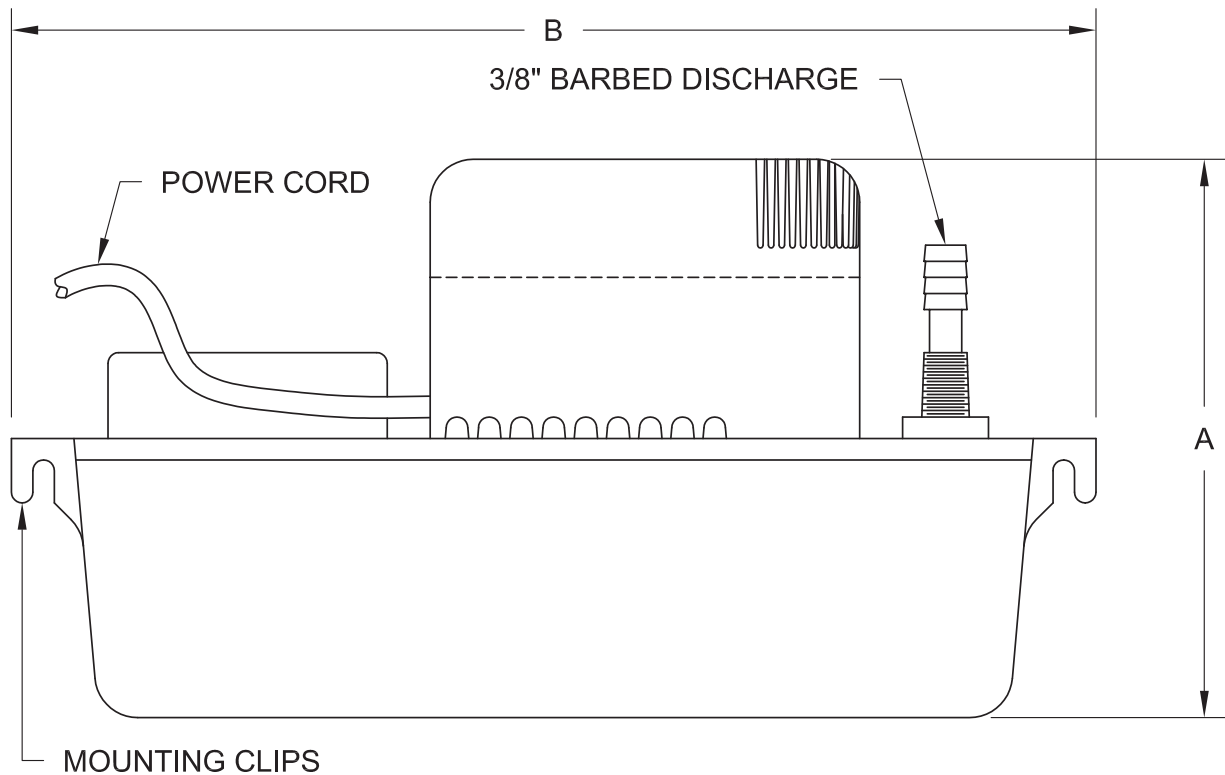

Model	Part No.	HP	Volts/PH	Hz	Full Load Amps	Dimensions in Inches (mm)			Weight (lbs)	Capacity (US quart)	Max. Head (Ft.)	Safety Switch	Cord Length (Ft.)
						Height A	Length B	Depth C					
BC15	135782	1/50	115/1	60	1.0	6.50 (165)	11.13 (283)	5.00 (127)	4.5	2	15	No	6.0
BC20S	135783	1/30	115/1	60	1.5	6.50 (165)	11.13 (283)	5.00 (127)	5.0	2	20	Yes	6.0