

# MYERS® MSE50

The Myers MSE50 residential sewage pumps are designed for high performance applications. With a recessed vortex impeller, this pump will easily pass 2" solids and pump up to 145 GPM. With a durable cast iron construction and reliable two-pole switch design, this pump is perfect for any residential sewage application.

## SPECIFICATIONS

Max Flow	145 GPM [549 LPM] at 5'
Max Shut-off Head	22' (6.7 m)
Solids Handling	2" (50.8 mm)
Intermittent Liquid Temperature	130°F (54.4°C)
Discharge, NPT	2" (50.8 mm)
Motor/Electrical Data	115V 9A 1Ø/230V 4.6A 1Ø
Acceptable pH Range	6-9
Cord Length	10' or 20' (3.1 m or 6.1 m)
Switch Type	Vertical
Switch On/Off	9.75 (247 mm) / 5.75 (146 mm)
Housing	Cast Iron
Volute	Cast Iron
Impeller	Thermoplastic recessed Vortex
Shaft Seal	Mechanical



## PERFORMANCE DATA

Head	Flow GPM(LPM)
5'	145
10'	105
15'	75
20'	16
22'	0

## FEATURES



- Durable Construction**  
 Durable cast iron construction for heavy duty applications
- Reliable Switch Design**  
 The unique two-pole switch is protected with a guard to block debris
- Free-flow Design**  
 Recessed impeller design also improves the free flow of solids up to 2"
- High Performance**  
 Capable of pumping up to 145 GPM and up to 22 feet of head

## ORDERING INFORMATION


Catalog Number	HP	Volts	Phases/Cycles	Amps	Discharge Size	Switch Type	Cord Length	Approx. Wt. Lbs.
MSE5012P10	1/2	115	1	9.0	2" (50.8 mm)	2-Pole Auto	10' (3.1 m)	43 (19.5 kg)
MSE5022P10	1/2	230	1	4.6	2" (50.8 mm)	2-Pole Auto	10' (3.1 m)	44 (20.0 kg)
MSE5012P20	1/2	115	1	9.0	2" (50.8 mm)	2-Pole Auto	20' (6.1 m)	43 (19.5 kg)
MSE5022P20	1/2	230	1	4.6	2" (50.8 mm)	2-Pole Auto	20' (6.1 m)	44 (20.0 kg)

# MYERS® MSE50

## DIMENSIONS

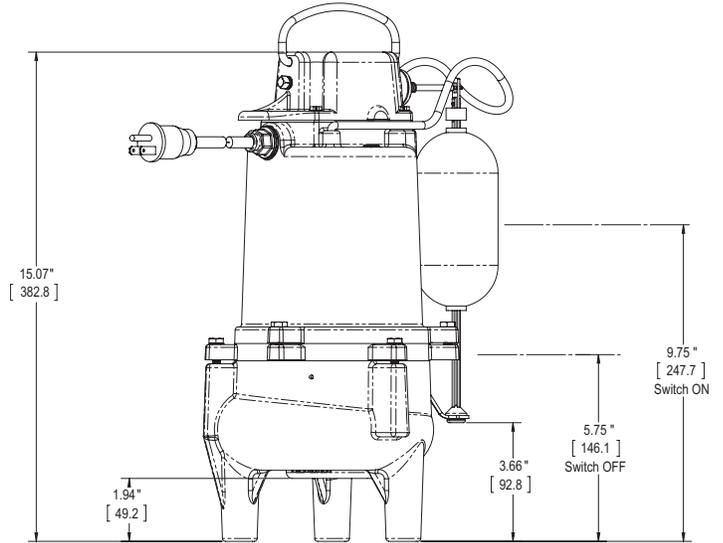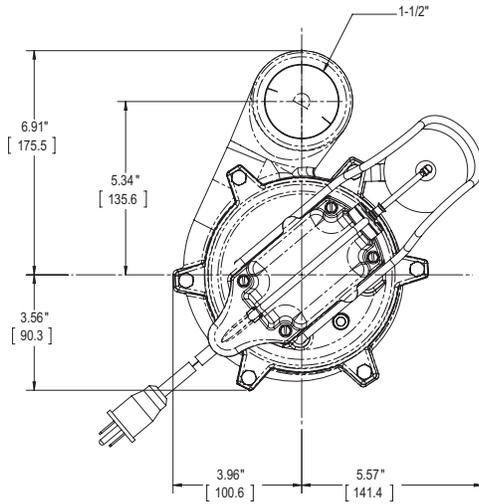

## PUMP PERFORMANCE

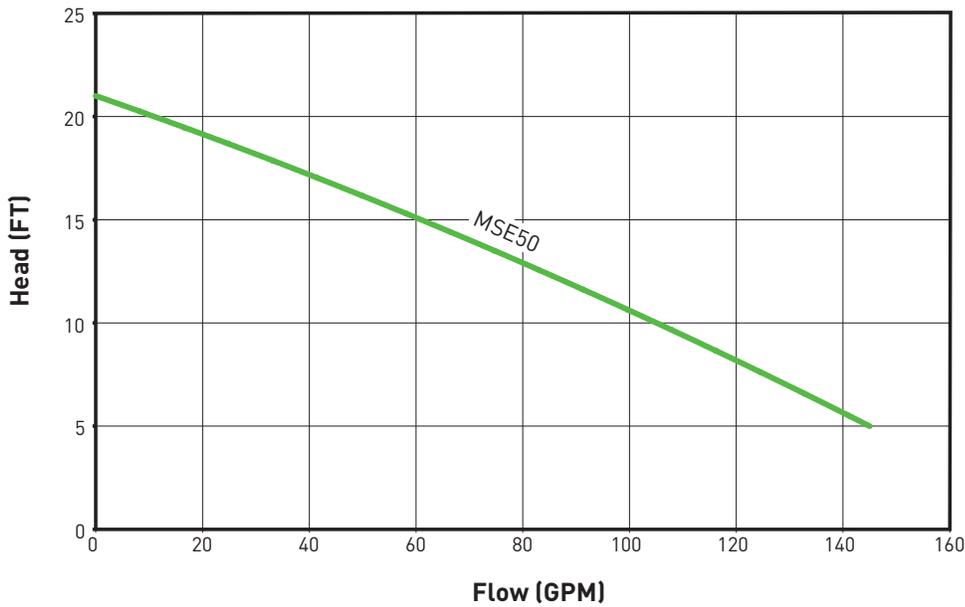

USA  
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM  
PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA  
490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO, N1T 0A5  
PH: 800-363-7867 FAX # 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.