

EAD

Timer controlled condensate drain



PRODUCT FEATURES

The EAD is designed to remove condensate from compressors, compressed air dryers and receivers up to any size, type or manufacturer.

The EAD offers true installation simplicity at the lowest possible cost. The EAD is a mass produced product available in various valve connection sizes and timer color options.


COMMERCIAL BENEFITS

- Does not air-lock during operation
- Compressed air systems up to any size
- The direct acting valve is serviceable
- Suitable for all types of compressors
- TEST (micro-switch) feature

TECHNICAL ADVANTAGES

- Simple to install
- Direct operated valve – not diaphragm type
- Medium pressure up to 230 PSI
- Viton seals

PRODUCT DIMENSIONS

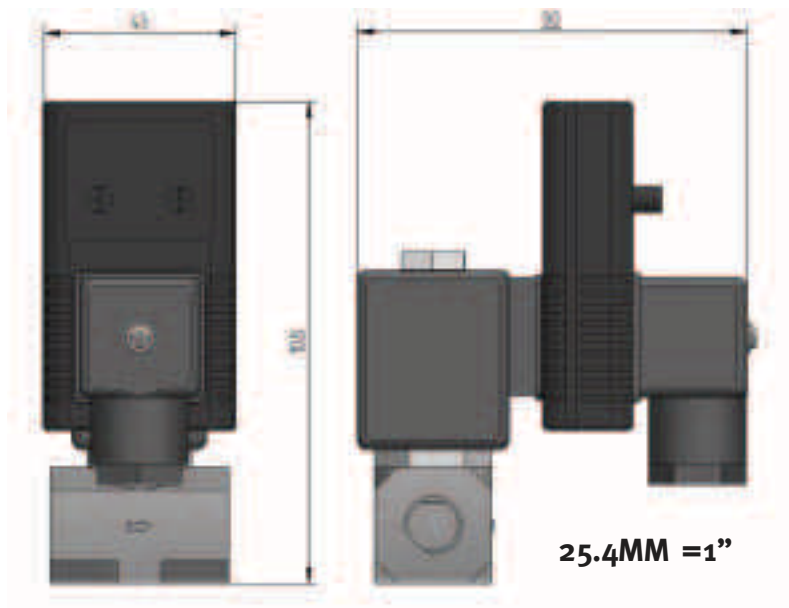

PRODUCT SPECIFICATIONS

Maximum compressor system capacity	Unlimited
Valve connection options	1/2", 3/8" and 1/4" NPT
Minimum system pressure	0 PSI
Maximum system pressure	230 PSI
Minimum medium temperature	34°F
Maximum medium temperature	130°F
Valve orifice	4.0 mm
Type of operating valve	Direct acting
Valve seals	FPM (Viton)
Installation enclosure	IP65/NEMA 4
Voltage range options	24 to 230VAC/DC 50/60 Hz.
Time cycle range (ON - OFF)	0.5/10 seconds – 0.5/45 minutes

WHERE TO INSTALL

