



# 4" Submersible Pumps

70 gpm series



*Precision engineered, quality built, and rugged 70 GPM Series submersibles may be used in wells 4" or larger. Maximum outside diameter 3-7/8".*

## APPLICATIONS

- **Water systems...** for residential, industrial, commercial, multiple housing and farm use.

## SPECIFICATIONS

**Discharge** – Cast iron, ASTM A48 Class 30

**Pump Bowls** – Cast iron, ASTM A48 Class 30

**Impellers** – Polycarbonate with brass insert

**Collets** – Stainless steel, AISI 416

**Upthrust Bearing** – Bronze, ASTM B255 Type II

**Pump Shaft** – Stainless steel, AISI 416

**Bowl and Intake Bearings** – Nitrile (proprietary spec.)

**Lead Guard** – Stainless steel, AISI 430

**Intake Bracket** – Cast iron, ASTM A48 Class 30

**Screen** – Stainless steel, AISI 430

**Pump/Motor Coupling** – Stainless steel, AISI 416

## FEATURES

**Discharge** – Heavy-duty cast iron construction provides smooth water passage to column pipe. NPT threads standard.

**Bowl and Intake Bearings** – Fluted, cutless rubber type assures superior abrasive-handling characteristics, located at each stage.

**Polycarbonate Impellers** – Glass-reinforced polycarbonate resists abrasives and provides smooth water passages for minimum friction loss. Ensures optimum pump efficiency.

**Pump Bowls** – Highly efficient hydraulic design... threaded bowl design in gray cast iron.

**Upthrust Bearing** – Bronze upthrust bearing provides positive momentary upthrust protection during start-up.

**Intake Bracket** – Efficient hydraulic design minimizes entrance losses, ensuring maximum pump performance.

**Stainless Steel Pump Shaft** – Precision straightened shaft is corrosion-resistant stainless steel.

**Pump/Motor Coupling** – Stainless steel for maximum corrosion resistance... precision machined to ensure accurate alignment and power transfer.

**Intake Screen** – Stainless steel material offers maximum corrosion resistance... protects against damaging solids entering the pump assembly.

PRO-Source™ is a trademark of Pentair Water.

In order to provide the best products possible, specifications are subject to change.



# 4" Submersible Pumps

70 gpm series


## ORDERING INFORMATION

Motor Type	HP	Stgs.	PH	Volt	Pump End			Motor		Control Box	
					Catalog Number	Length Inches*	Weight Pounds*	Catalog Number	Weight Pounds*	Catalog Number	Weight Pounds*
2 Wire	1-1/2	4	1	230	L70F4	20-25/32	26	P42B0015A2	29		
3 Wire	1-1/2	4	1	230	L70F4	20-25/32	26	P43B0015A2	27	SMC-CR1521	7
	1-1/2	4	3	230	L70F4	20-25/32	26	P43B0015A3	23		
	1-1/2	4	3	460	L70F4	20-25/32	26	P43B0015A4	23		
	2	5	1	230	L70G4	24-1/16	31	P43B0020A2	31	SMC-CR2021	7
	2	5	3	230	L70G4	24-1/16	31	P43B0020A3	27		
	2	5	3	460	L70G4	24-1/16	31	P43B0020A4	27		
	3	7	1	230	L70H4	30-5/8	39	P43B0030A2	40	SMC-CR3021	7
	3	7	3	230	L70H4	30-5/8	39	P43B0030A3	32		
	3	7	3	460	L70H4	30-5/8	39	P43B0030A4	32		
	5	12	1	230	L70J4	47-1/32	60	P43B0050A2	70	SMC-CR5021	8
	5	12	3	230	L70J4	47-1/32	60	P43B0050A3	55		
	5	12	3	460	L70J4	47-1/32	60	P43B0050A4	55		
	7-1/2	17	3	230	L70K4	63-7/16	81	P43B0075A3	70		
	7-1/2	17	3	460	L70K4	63-7/16	81	P43B0075A4	70		
	10	23	3	460	L70L4	83-1/8	106	P43B0100A4	70		


\*Length and Weight are approximate.

**NOTE:** Pump end and motor purchased separately.

## OUTLINE DIMENSIONS

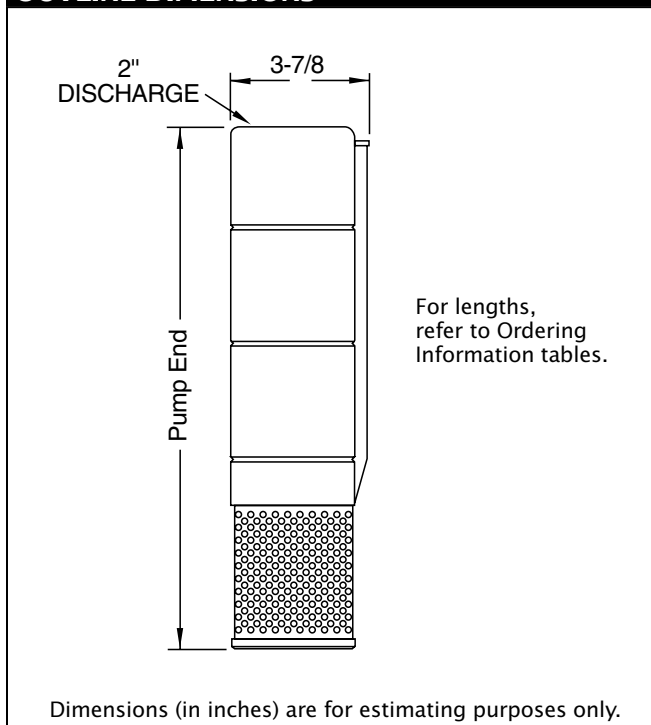

## PUMP PERFORMANCE – 70 GPM

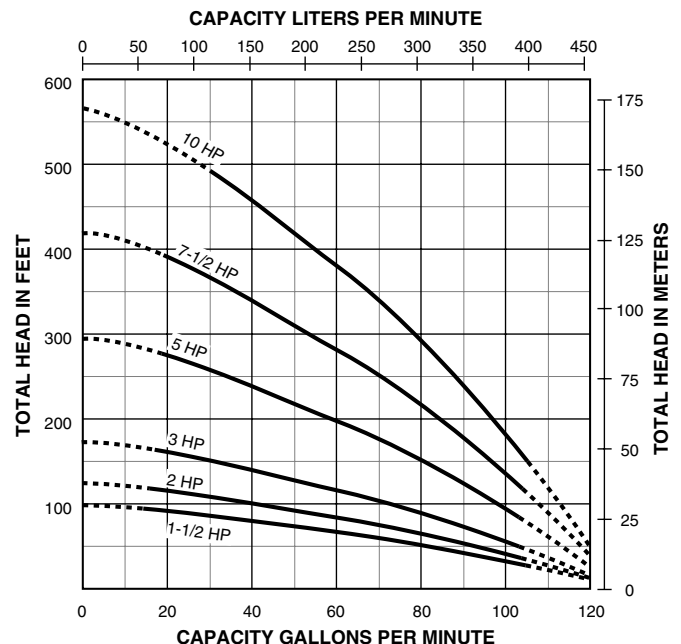

Tested and rated in accordance with Water Systems Council Standards.

**NOTE:** Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.



# 4" Submersible Pumps

70 gpm series

70 Gallons per Minute		PUMP PERFORMANCE (Capacity in Gallons Per Minute)																						
HP	PSI	Pumping Depth in Feet																						
		20'	40'	60'	80'	100'	125'	150'	175'	200'	225'	250'	275'	300'	325'	350'	375'	400'	425'	450'	475'	500'	525'	550'
1-1/2	0	—	92.5	70.0	40.0																			
	20	61.5	31.0																					
	30	25.0																						
	40																							
	50																							
	60																							
2	0	—	100.0	85.0	64.0	40.0																		
	20	79.0	57.0	32.5																				
	30	52.5	28.0																					
	40	25.0																						
	50																							
	60																							
3	0	—	104.0	98.0	86.0	73.5	52.5	31.0																
	20	95.0	82.5	68.0	52.0	35.0																		
	30	81.0	66.0	49.0	32.0																			
	40	64.0	47.0	29.0																				
	50	43.0	25.5																					
	60	22.0																						
5	0	—	—	—	106.0	99.0	91.0	82.0	72.0	60.0	47.5	35.0	21.0											
	20	—	104.0	97.0	90.5	83.5	74.0	62.0	49.5	37.0	23.0													
	30	102.5	96.0	88.5	82.5	74.5	63.0	50.0	38.0	25.0														
	40	95.0	87.5	81.5	73.5	64.0	51.5	39.0	26.0															
	50	86.0	80.0	72.0	62.0	52.0	39.5	27.0																
	60	78.0	70.0	61.0	50.0	40.0	27.5																	
7-1/2	0	—	—	—	—	108.0	103.0	97.0	91.0	85.0	78.0	75.0	62.5	54.0	45.5	35.5								
	20	—	—	108.0	102.5	97.5	92.0	86.0	80.0	76.0	64.9	56.0	47.0	37.5	27.5									
	30	—	107.5	102.0	97.0	92.5	87.0	80.5	76.5	65.0	56.5	47.5	38.0	28.0										
	40	107.0	101.5	96.5	92.0	87.5	81.5	77.0	65.5	57.0	48.0	38.5	29.0											
	50	101.0	96.0	91.0	86.0	82.0	77.0	66.0	57.5	48.0	39.0	30.0	20.0											
	60	95.0	90.0	85.0	80.5	77.5	66.5	57.5	49.0	40.0	31.0	21.0												
10	0	—	—	—	—	—	110.0	106.0	102.0	97.5	93.0	88.0	84.0	79.0	74.9	68.0	62.0	55.0	48.0	42.5	36.0			
	20	—	—	—	110.0	107.0	102.5	98.5	93.5	89.0	85.0	80.0	75.5	69.5	62.5	56.0	49.5	43.0	37.0	31.0				
	30	—	—	109.5	106.5	103.0	99.0	94.0	89.5	85.0	80.5	76.0	70.0	63.0	57.0	55.0	43.5	37.5	31.5					
	40	—	109.0	106.0	102.5	99.5	95.0	90.0	85.5	81.0	76.5	70.5	64.0	57.5	51.0	44.0	38.0	32.0						
	50	108.0	105.5	102.0	98.5	95.0	90.0	86.0	81.5	76.5	71.0	64.5	57.5	51.5	44.5	38.0	32.5							
	60	104.5	101.5	98.0	94.0	91.0	86.5	82.0	77.0	72.0	65.0	58.0	52.0	46.0	38.5	32.5								

**CAUTION: DO NOT** use pump at flow rates indicated by the symbol '—'.

To do so can cause premature failure of unit. Pump warranty void when failure occurs under these conditions.

Tested and rated in accordance with Water Systems Council Standards.

**NOTE:** Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.