

Effluent Pumps

WE SERIES 1/2 HP

High Head Filtered Effluent Pumps




Applications

- Filtered effluent service, aeration, ornamental fountains/waterfalls

Features

- 1/2 hp Franklin Electric submersible motor
- Heavy duty, 300 V, 10' (3 m) SJOW motor stripped leads
- 1-1/4" FNPT (31.7 mm) discharge
- Removable built-in check valve
- Non-corrosive thermoplastic discharge and motor brackets
- Proven Noryl® staging allows close tolerances and increased performance
- High quality top bearing for maximum durability and years of reliable service
- Hex rubber bearing has extra-large surface for shaft stability and multiple flow channels for keeping particles away from bearing surfaces
- Stainless steel upthrust washer prevents excessive wear in service applications

Performance Curve

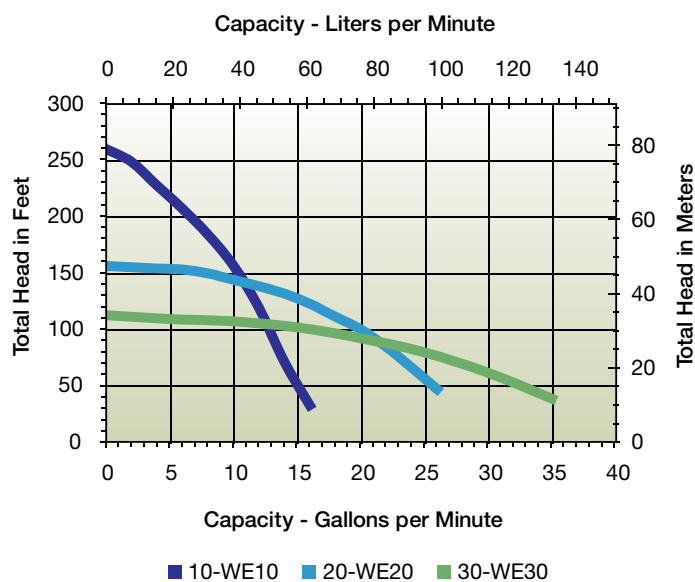

Model Characteristics

Item #	Model	HP	Volts/Hertz	Rated Flow Rate	Wire	Discharge (FNPT)	Cord/ Length
558221	WE10G05P4-21	1/2	115 V/60 Hz	10 gpm 37.9 lpm	2-Wire	1-1/4" FNPT 31.7 mm	SJOW/10' 3 m
558223	WE20G05P4-21	1/2	115 V/60 Hz	20 gpm 75.7 lpm	2-Wire	1-1/4" FNPT 31.7 mm	SJOW/10' 3 m
558225	WE30G05P4-21	1/2	115 V/60 Hz	30 gpm 113.5 lpm	2-Wire	1-1/4" FNPT 31.7 mm	SJOW/10' 3 m
558222	WE10G05P4-22	1/2	230 V/60 Hz	10 gpm 37.9 lpm	2-Wire	1-1/4" FNPT 31.7 mm	SJOW/10' 3 m
558224	WE20G05P4-22	1/2	230 V/60 Hz	20 gpm 75.7 lpm	2-Wire	1-1/4" FNPT 31.7 mm	SJOW/10' 3 m
558226	WE30G05P4-22	1/2	230 V/60 Hz	30 gpm 113.5 lpm	2-Wire	1-1/4" FNPT 31.7 mm	SJOW/10' 3 m